


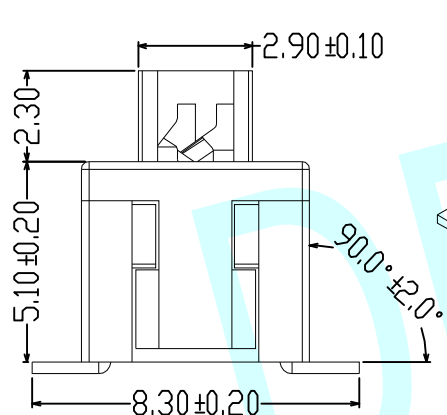
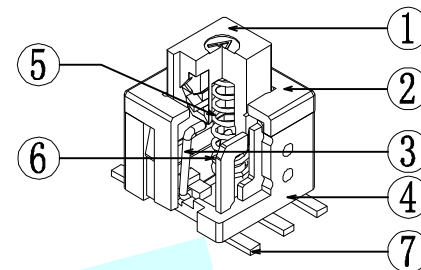
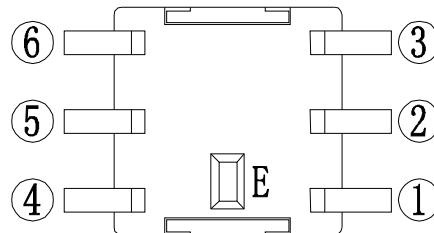
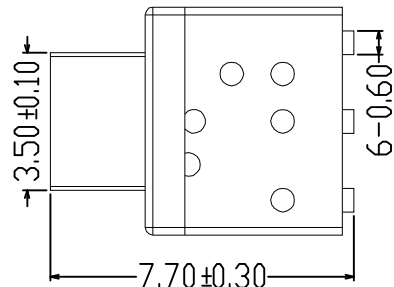



ROHS

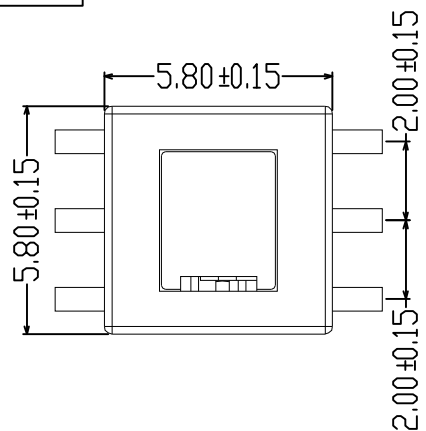

Circuit Diagram

NOTE:

1. Rated current:DC 30V 0.1A
2. Withstand voltage:AC 250V(50/60Hz) for 1 minute
3. Contact resistance:100mΩ max
4. Insulation resistance:100MΩ min, 500V DC
5. Operating force:200±50gf
6. Full stroke:2.00mm±0.20mm
7. Operation type: self locking
8. Life:10,000 Cycles

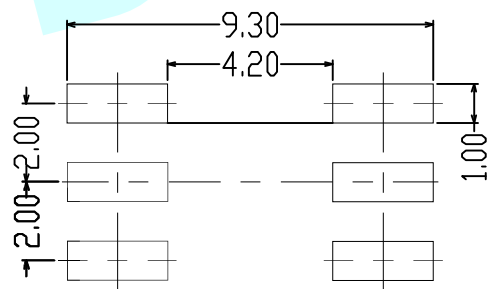

PCB LAYOUT

7	端子	6	黄铜	镀银 (Ag)
6	簧片	2	磷铜	覆银 (Ag)
5	弹簧	1	不锈钢丝	
4	底座	1	尼龙	灰色
3	钩针	1	不锈钢丝	
2	盖子	1	尼龙	灰色
1	导芯	1	尼龙	
序号	名称	数量	材料	备注

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30°	±0.30
APPOVALS:	***	***	10°30'	±0.20
			5°10'	±0.15
			≤5	±0.10
			±2°	
			<b>东都电子</b> DONGDU ELECTRONICS	
MODEL:		PUSHBUTTON SWITCHES		
PART NO:		DDU-1315		
UNIT :mm	SCALE:1:1			
REV:	A	PAGE:1/1		