
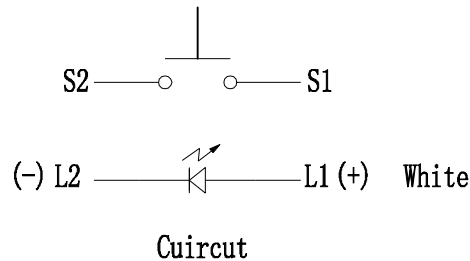

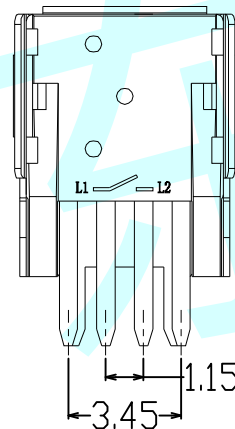
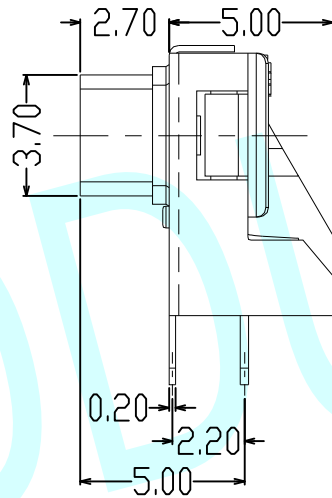
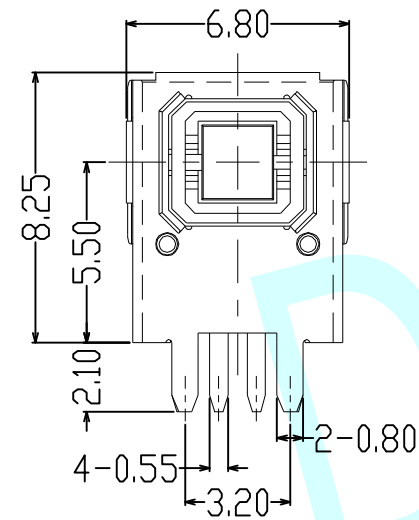

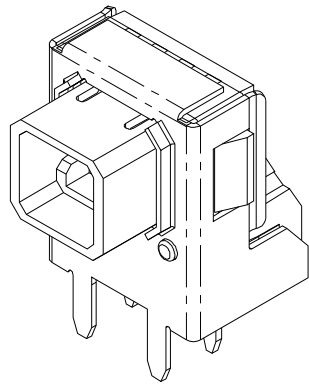


ROHS

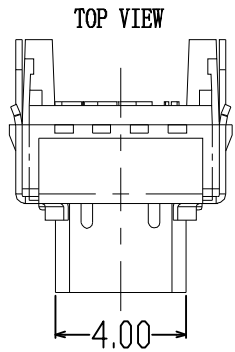

NOTES:

- A. Electrical characteristics:**
1. Rating: 50mA 12V DC
 2. Contact resistance: 100mΩ max (Initial)
 3. Insulation resistance: 100MΩ min (at 250V DC)
 4. Dielectric strength: AC 250V (50~60Hz) for 1minute
 5. Bounce: 10m sec max
 6. LED operating current: 20mA max
- B. Mechanical characteristics:**
1. Actuating force: 220±80gf
 2. Travel: 0.25±0.1mm
 3. Return force: 50gf min
 4. Stop strength: 2KG/60 sec
 5. Stem strength: 1KG/60 sec
 6. Operating life: 100,000 cycles min
 7. Operating temperature: -20°C~+70°C

NO.	PART NAME	MATERIAL	Q' TY	FINISHING
1	CAP	PPA	1	BLACK
2	BUTTON	PPA	1	BLACK
3	COVER	SUS301	1	Sn PLATED
4	DUSTPROOF PIECE	SILICONE RUBBER	1	Sn PLATED
5	BASE	PA66	1	BLACK
6	TERMINAL	C2680/Ag 12μ" min	4	Ag PLATED
7	CONTACT	STAINLESS STEEL METAL	1	
8	LED	GaAsP/GaP	1	

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥ ±0.30	±2°
APPOVALS:	***	****	10~30 ±0.20	
			5~10 ±0.15	
			≤5 ±0.10	



MODEL:	LED Tact Switch	
PART NO:	DDU-1557-W	
UNIT :mm	SCALE: 1:1	
REV:	A	PAGE: 1/1