
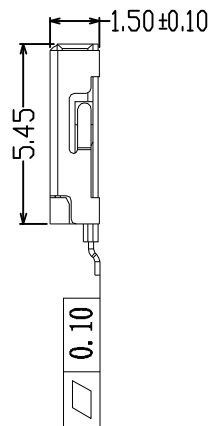


ROHS

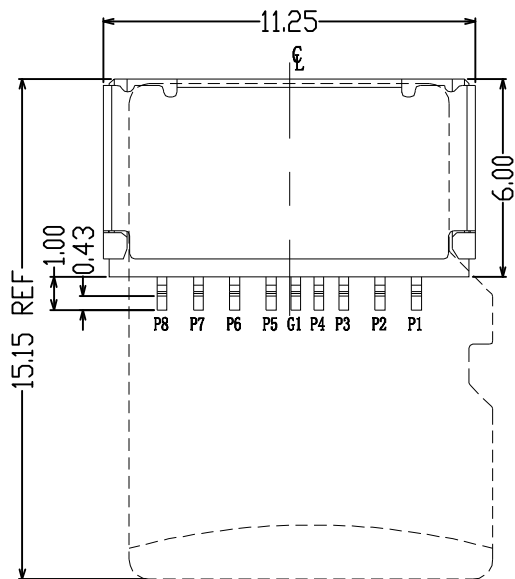



NOTES:

A. Material:


1. Housing: High-temp, plastic UL 94V-0
2. Contact: Copper alloy T=0.15
3. Shell: Stainless steel T=0.15

B. Finish:

1. Contact: Gold flash plated on contact area
Gold flash plated on solder tails
2. Shell: Nickel plated overall

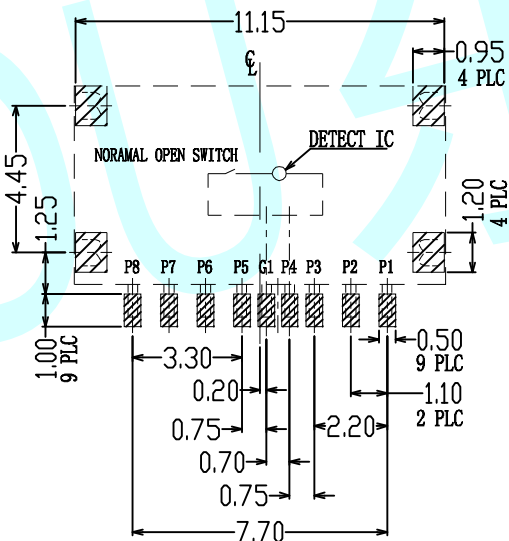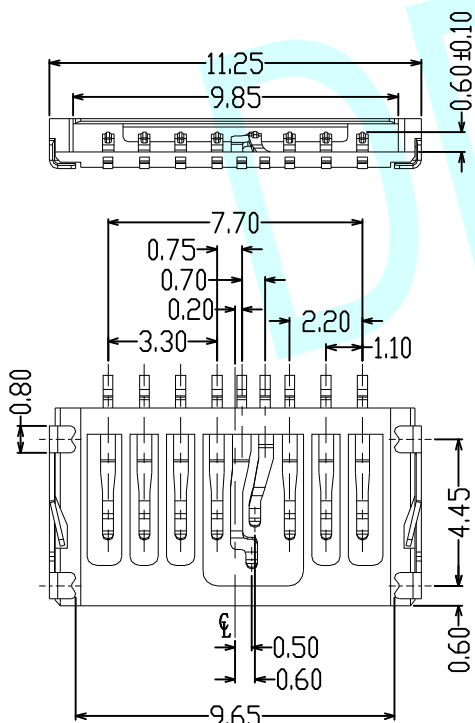


RECOMMENDED PCB LAYOUT
TOL: ±0.05

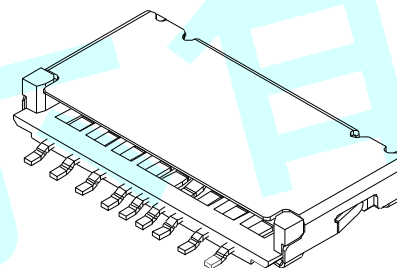

P8	DAT1
P7	DAT0
P6	VSS
P5	CLK
G1	SWITCH
P4	VDD
P3	CMD
P2	CD/DAT3
P1	DAT2
PIN NO.	PIN NO.

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30° ±0.30	±2°
APPOVALS:	***	****	10°30' ±0.20	
			5°10' ±0.15	
			≤5 ±0.10	

 东都电子 DONGDU ELECTRONICS	
MODBL:	CASSETTE
PART NO:	TP-HL-5-A
UNIT :mm	SCALE:1:1
REV:	A
	PAGE:1/1