
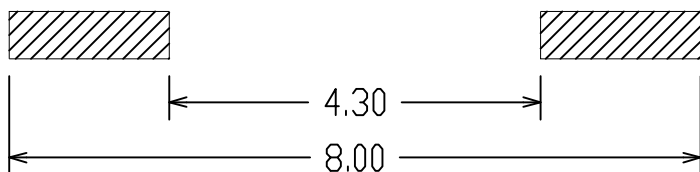
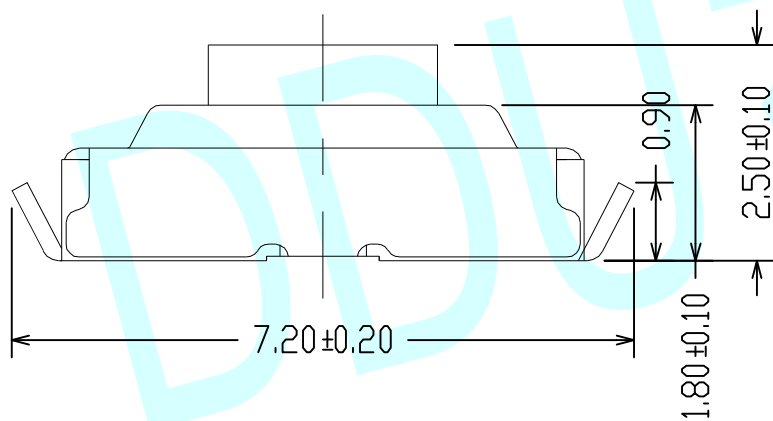




ROHS

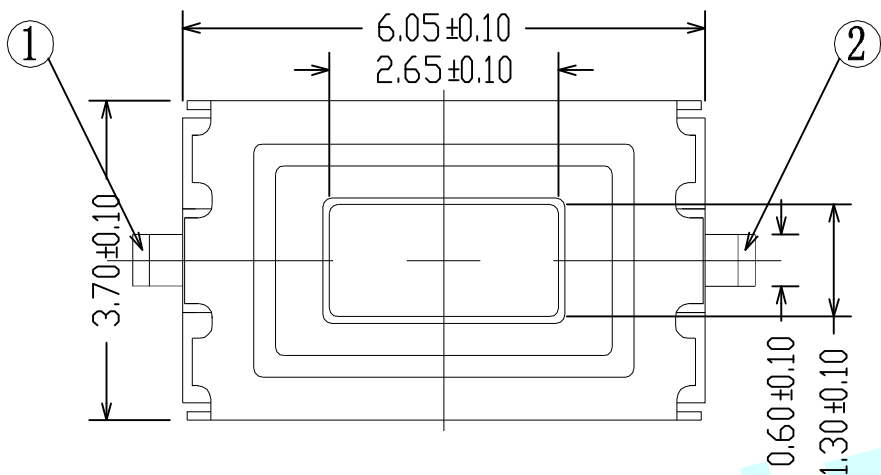



Installation diagram

NOTES:

1. Rated current: 50mA 12V DC
2. Insulation resistance: 100MΩ min, 100V DC
3. Dielectric strength: 250V AC for 1min
4. Contact resistance: 200mΩ max, the decay value is within 20% of the initial value after high temperature of 260 °C.

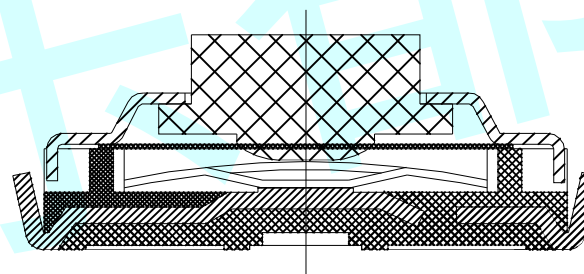

Circuit Diagram

APPROVALS		DATE	http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	****	30° ≥ ±0.30	±2°	
APPOVALS:	***	****	10°~30 ±0.20		
			5°~10 ±0.15		
			≤5 ±0.10		MODEL: TACT SWITCHES PART NO: DDU-1185UT UNIT :mm SCALE: 1:1  REV: A PAGE: 1/1