
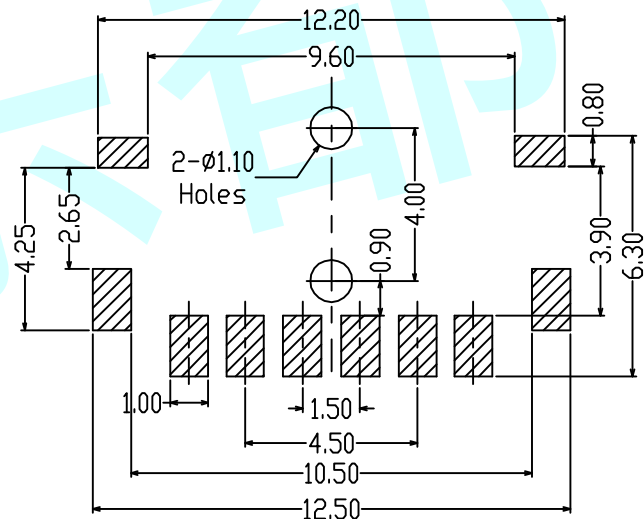
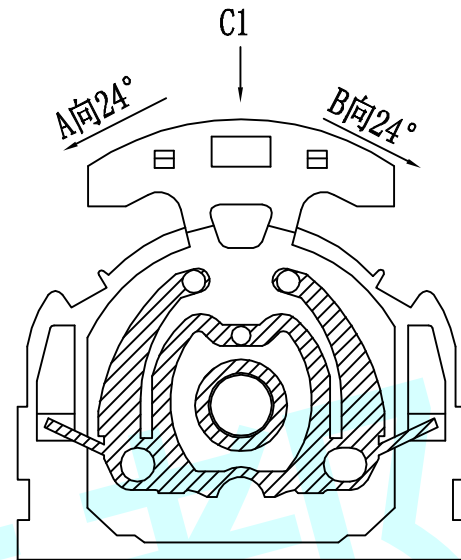
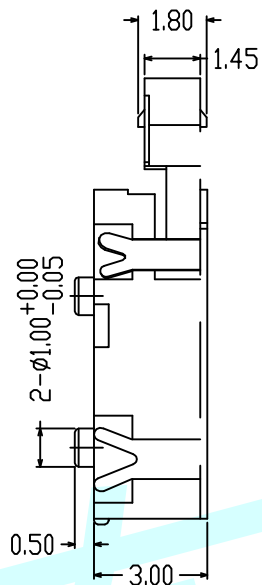



ROHS

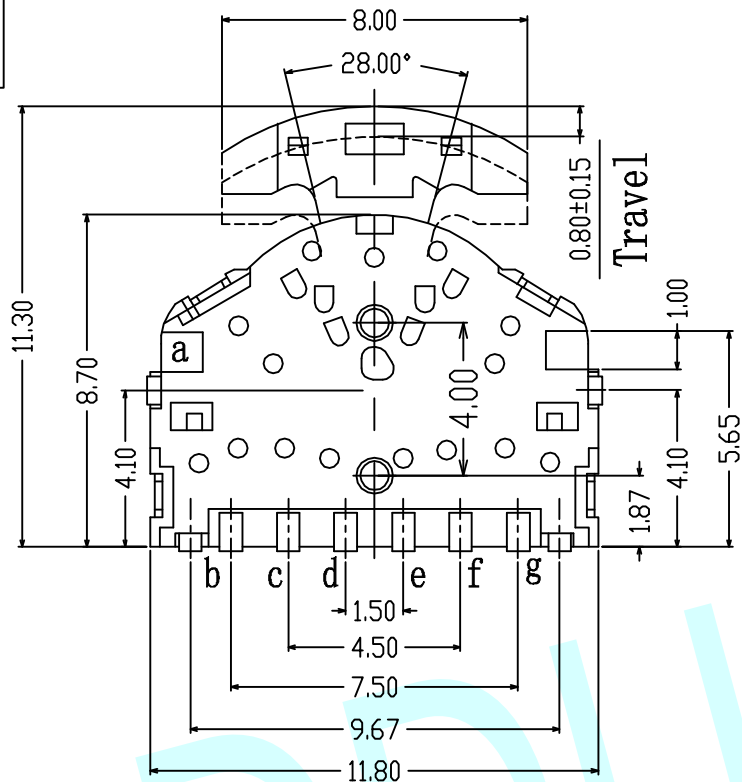

PCB Mounting  
Pattern Dimension

NOTES:

1. Rating: DC 5V 10mA
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ MIN
4. Service life: 100,000 cycles
5. Operating temperature: -25°C~+85°C
6. Using humidity: ≤85% RH
7. Operating Force :
  - a. Lever Porting : 70±40gf
  - b. Push Portion : 200±40gf

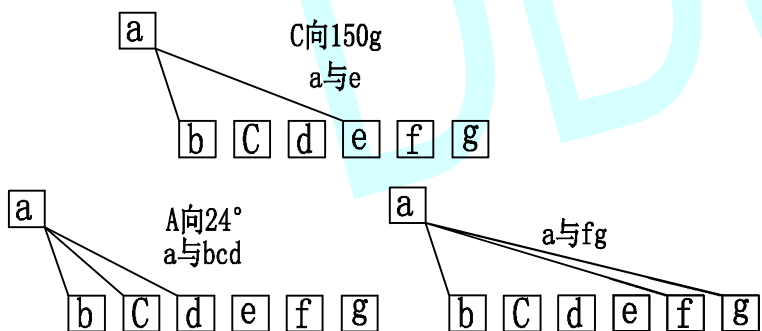

Circuit Diagram

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	****	30°	±0.30	
APPOVALS:	***	****	10°30'	±0.20	
			5°10'	±0.15	
			≤5	±0.10	
			±2°		
				MODL:	ROCKER SWITCH
				PART NO:	DDU-1228
				UNIT :mm	SCALE: 1:1
			REV:	A	
				PAGE: 1/1	



MODL:	ROCKER SWITCH
PART NO:	DDU-1228
UNIT :mm	SCALE: 1:1
REV:	A
	PAGE: 1/1