
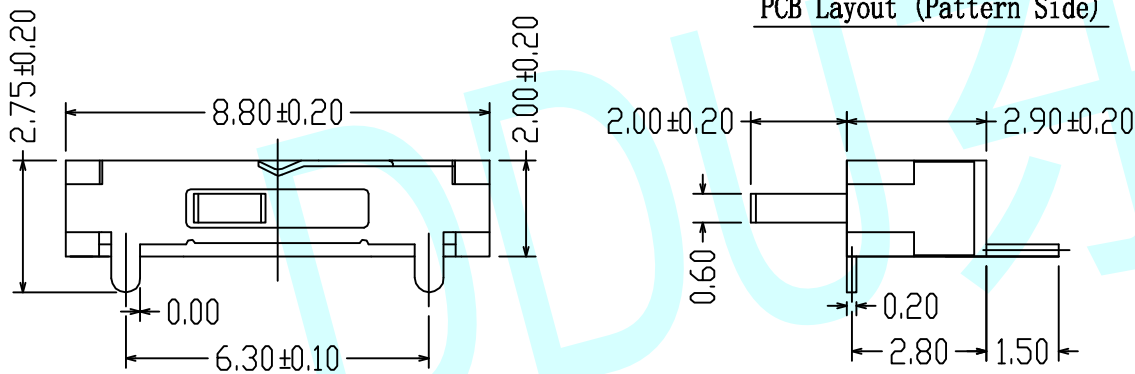
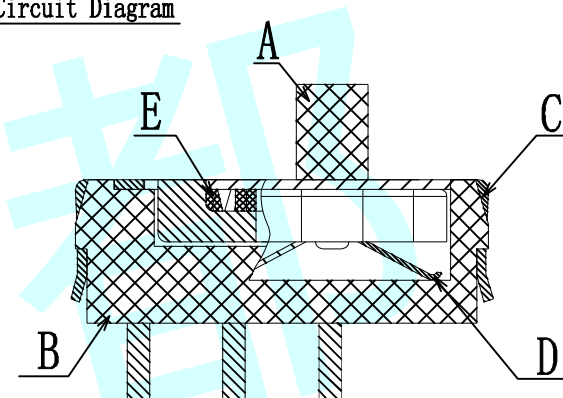

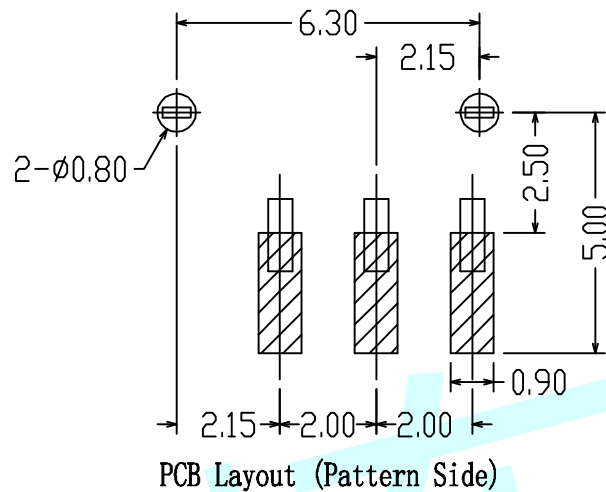


ROHS

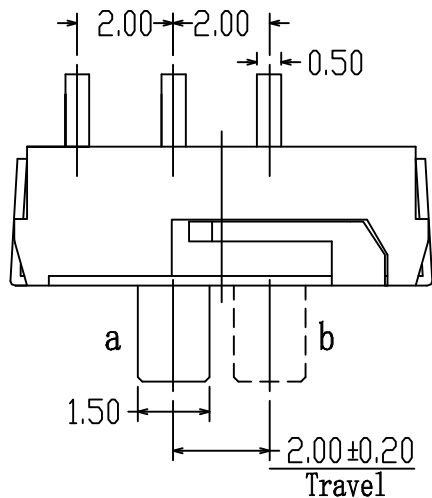


Note :

1. Operating Force : 180 ± 50 gf
2. Rated voltage: DC 5V 50mA
3. Insulation resistance: $\geq 100M\Omega$
4. Contact resistance: $\leq 100m\Omega$
5. Withstand voltage: AC 250V 50Hz/minute
6. Electrical life: 10000 cycles min
7. Ambient temperature: $-25^{\circ}C \sim +70^{\circ}C$

E	Shrapnel	1	SUS	Silvery white
D	Contact	1	Silver coated copper	Silver inlaid with silver
C	Lid	1	SUS	Silvery white
B	Base	1	LCP/H65	BLACK/Ag plating
A	Knob	1	Reinforced nylon	BLACK
NO.	PART NAME	Q' TY	MATERIAL	FINISH

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 \geq	± 0.30
APPROVALS:	***	***	10 \sim 30	± 0.20
			5 \sim 10	± 0.15
			≤ 5	± 0.10


® 东都电子
 DONGDU ELECTRONICS
 MODEL: TOGGLE SWITCHES
 PART NO: DDU-1451
 UNIT :mm SCALE: 1:1
 REV: A PAGE: 1/1