

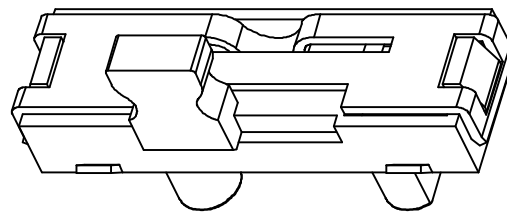
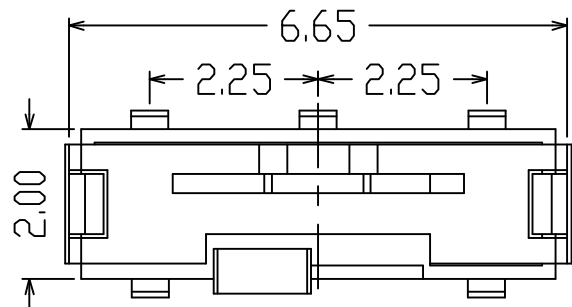
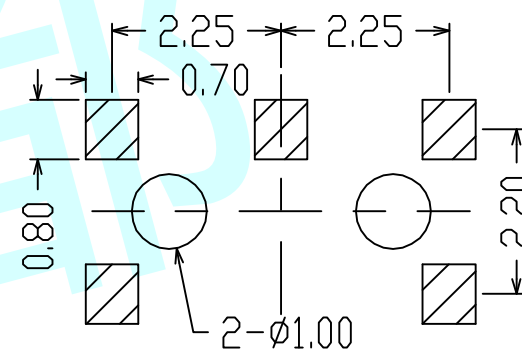
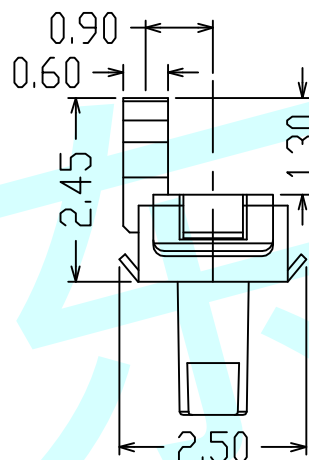



ROHS

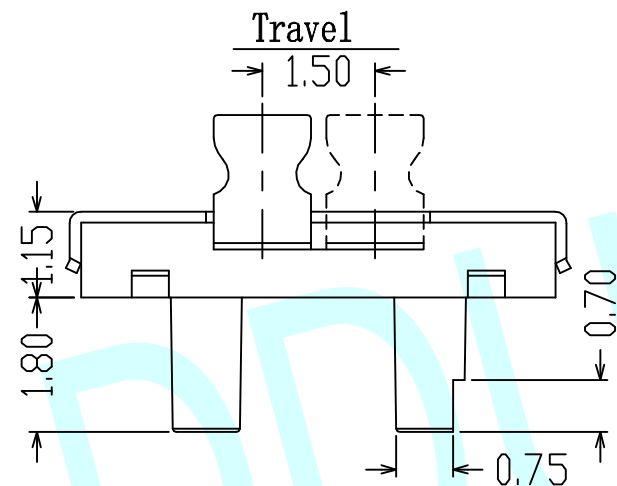

Circuit Diagram





PCB Layout (Pattern Side)

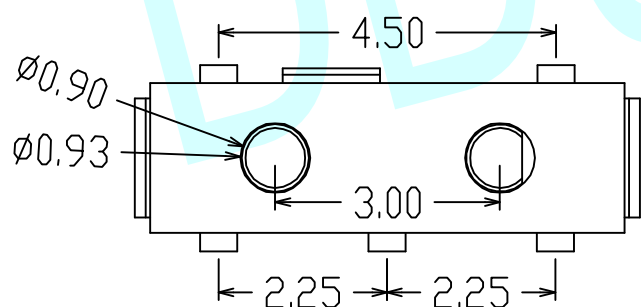

NOTES:

1. Rating :DC 12V 50mA
2. Contact Resistance: $\leq 50m\Omega$
3. Insulation Resistance: DC 50V 1Minute
4. Operating Temperature Range: $-25^{\circ}C \sim 80^{\circ}C$
5. Ambient Humidity Used: $\leq 85\%RH$
6. Operating Force: $150 \pm 80gf$
7. Operating Life: 50,000Cycles

APPROVALS		DATE	http://www.dongdudz.com		 ® 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	***	30 \geq	± 0.30	$\pm 2^{\circ}$
APPOVALS:	***	***	10 \sim 30	± 0.20	
			5 \sim 10	± 0.15	
			≤ 5	± 0.10	
MODEL:	TOGGLE SWITCHES		UNIT :mm	SCALE: 1:1	
PART NO:	DDU-1403S		REV:	A	
			PAGE: 1/1		