






ROHS

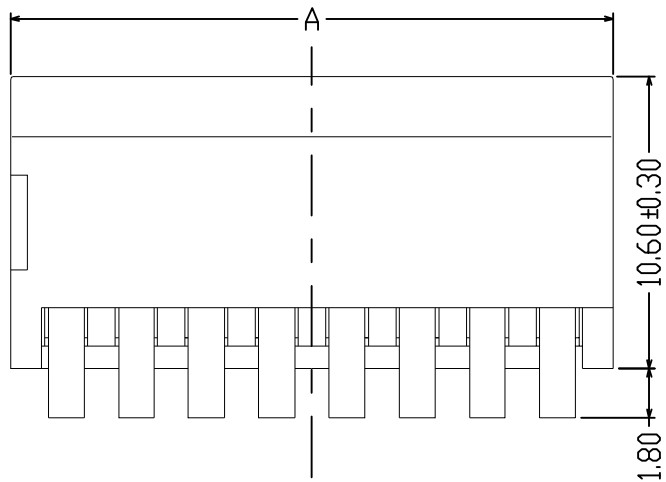

Circuit Diagram

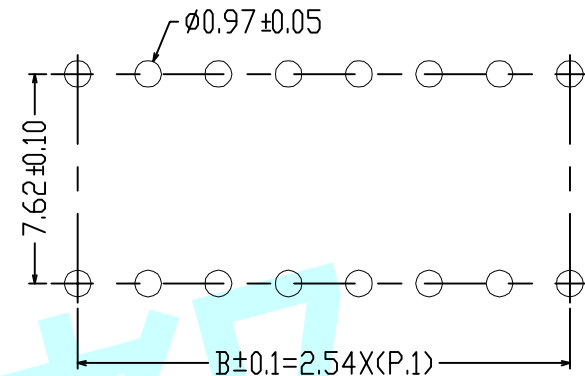

PCB Layout (Pattern Side)

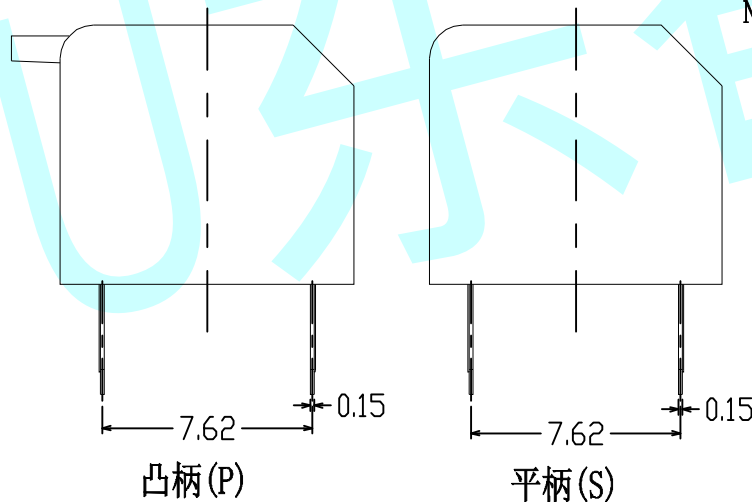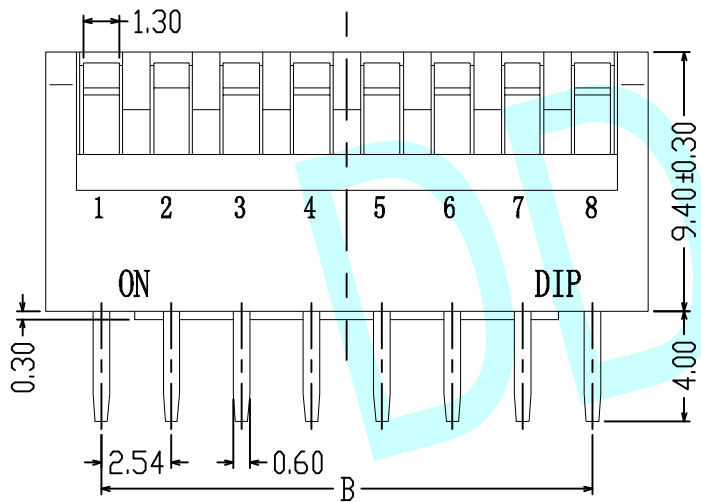


NOTES:

1. Rating :24V 25mm DC
2. Insulation Resistance : $\geq 100\Omega$
3. Withstand Voltage :AC 500V 1minute
4. Operating Force Range :400gf Max
5. Mechanical Life :3,000 Cycles
6. Operating Temperture Range : $-40^{\circ}\text{C}\sim +80^{\circ}\text{C}$
7. Ambient Humidity Used : $\leq 85\%RH$

Position(位数)	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM. A(长度)	6.54	9.08	11.62	14.16	16.70	19.24	21.78	24.32	26.86	31.94
DIM. B(长度)	2.54	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	27.94

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30 \geq	± 0.30
APPOVALS:	***	****	10 \sim 30	± 0.20
			5 \sim 10	± 0.15
			≤ 5	± 0.10

 东都电子	
DONGDU ELECTRONICS	
MODEL:	DIP SWITCH
PART NO:	DDU-DP
UNIT :mm	SCALE:1:1
REV:	A