

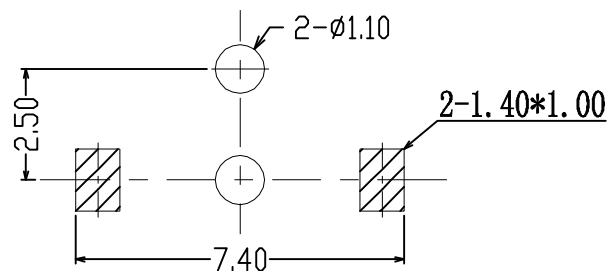



ROHS

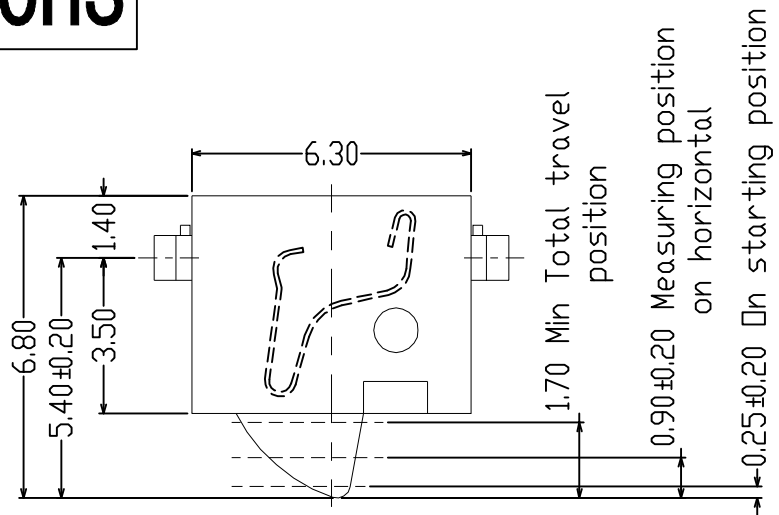

PCB LAYOUT



CIRCUIT DIRGRAM

Operating direction

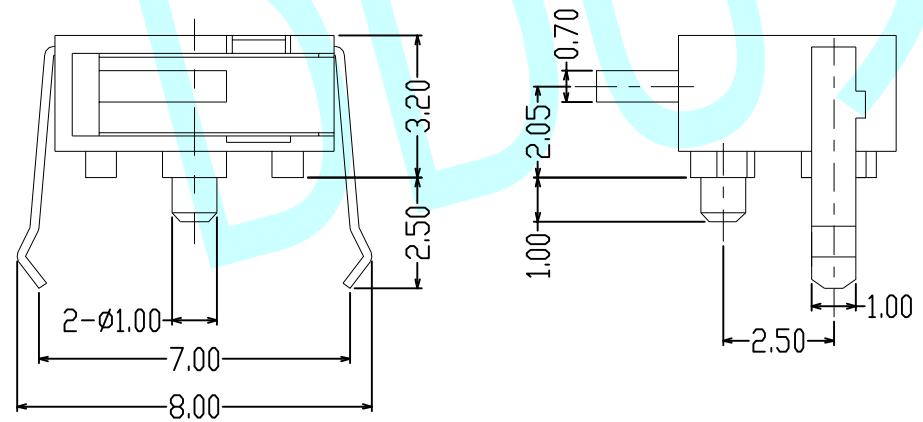

NOTES:

1. Rating:DC 30V 0.1A
2. Contact resistance:100mΩ max
3. Insulation resistance:100MΩ min
4. Life time:100,000 Cycles
5. Usage temperature:-20℃~+80℃
6. Action intensity:30gf max
7. Welding temperature:235±5℃, 5S

APPROVALS		DATE	http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	****	30° ≥ ±0.30	±2°	
APPOVALS:	***	****	10°~30 ±0.20		
			5°~10 ±0.15		
			≤5 ±0.10		MODEL: DETECTOR SWITCHS PART NO: DDU-1616 UNIT :mm SCALE:1:1  REV: A PAGE:1/1