

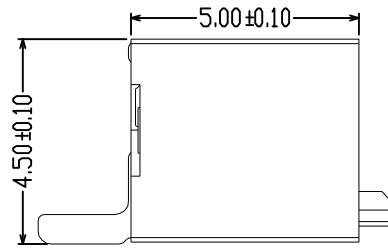
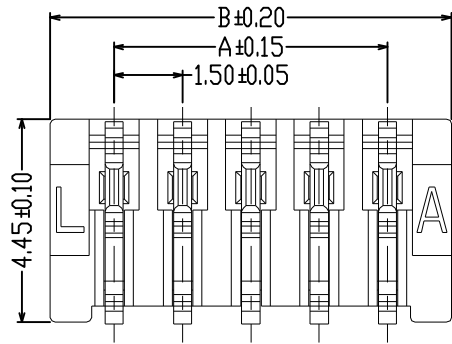
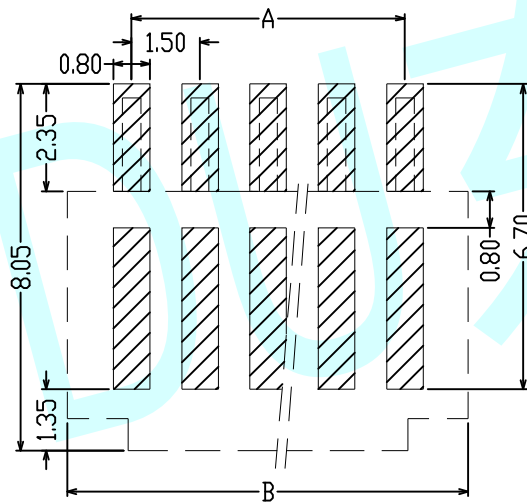



# ROHS

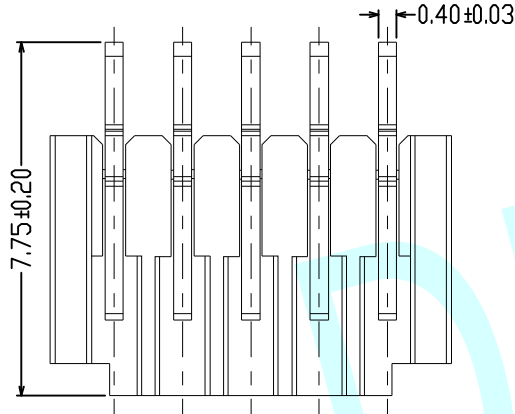

0.10 MAX

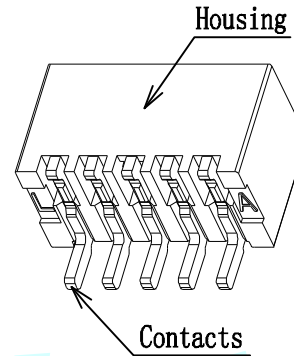


SUGGESTED PCB LAYOUT

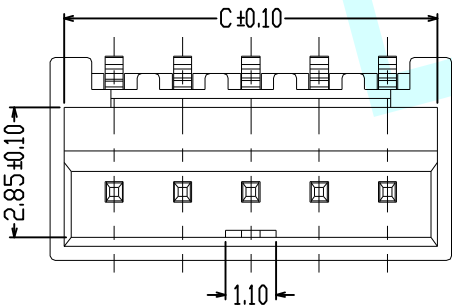

### Specifications:

- Contact resistance:  $\leq 20m\Omega$
- Insulation resistance:  $\geq 1000M\Omega$
- Rated voltage: 350V AC DC
- Rated current: 3A AC DC
- Withstand voltage: 500V AC/minute
- Temperature range:  $-25^{\circ}C \sim +85^{\circ}C$
- Housing: LCP UL94V-0, Natural
- Contacts: Phosphor bronze/MATTE Sn

PIN	A	B	C
2P	1.50	4.30	3.70
3P	3.00	5.80	5.20
4P	4.50	7.30	6.70
5P	6.00	8.80	8.20
6P	7.50	10.30	9.70
7P	9.00	11.80	11.20
8P	10.50	13.30	12.70
9P	12.00	14.80	14.20
10P	13.50	16.30	15.70
11P	15.00	17.80	17.20
12P	16.50	19.30	18.70
13P	18.00	20.80	20.20
14P	19.50	22.30	21.70
15P	21.00	23.80	23.20

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 $\geq$	$\pm 2^{\circ}$
APPOVALS:	***	***	10 $\sim$ 30	
			5 $\sim$ 10	
			$\leq 5$	
				
			MODBL: Connector PART NO: 1.57-nP-WT UNIT :mm SCALE:1:1 REV: A PAGE:1/1	