
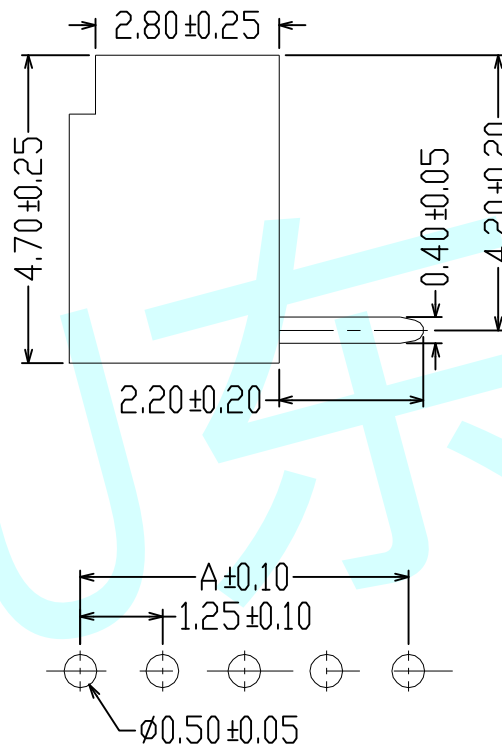


ROHS

SPECIFICATIONS:


1. Current rating:1A AC/DC
2. Voltage rating:125V AC/DC
3. Temperature range:-25℃~+85℃
4. Contact resistance:20mΩ max
5. Insulation resistance:100MΩ min
6. Withstanding voltang:500V AC/minute
7. Material:Wafer Nylon46, UL94V-0
PIN Brass Tin-plated

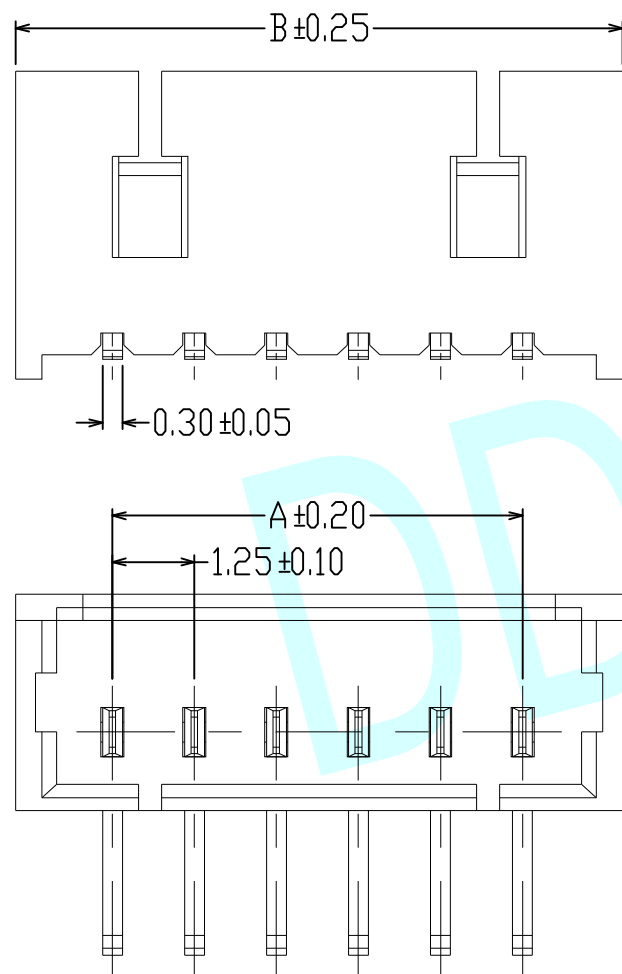

PCB LAYOUT

编号	尺寸 (mm)	
	A	B
02AW	1.25	4.25
03AW	2.50	5.50
04AW	3.75	6.75
05AW	5.00	8.00
06AW	6.25	9.25
07AW	7.50	10.50
08AW	8.75	11.75
09AW	10.00	13.00
10AW	11.25	14.25
11AW	12.50	15.50
12AW	13.75	16.75
20AW	23.75	26.75

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30°	±0.30
APPOVALS:	***	***	10°30'	±0.20
			5°10'	±0.15
			≤5	±0.10

 东都电子 DONGDU ELECTRONICS	
MODEL:	Connector
PART NO:	1.25T-nP-W
UNIT :mm	SCALE:1:1
REV:	A