
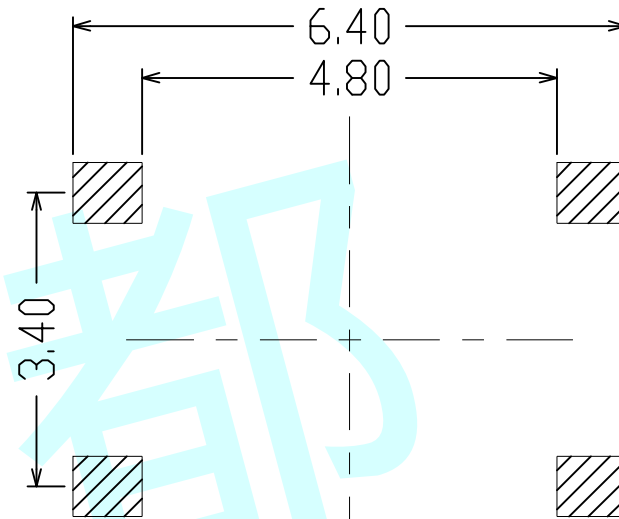
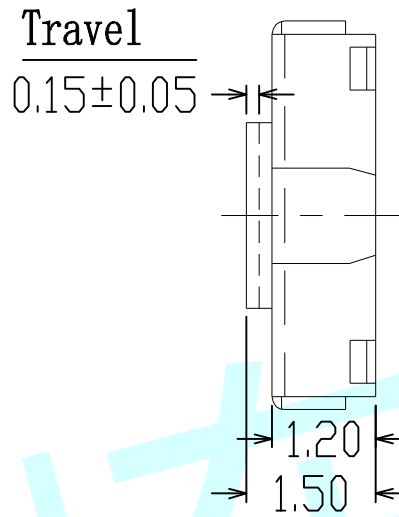
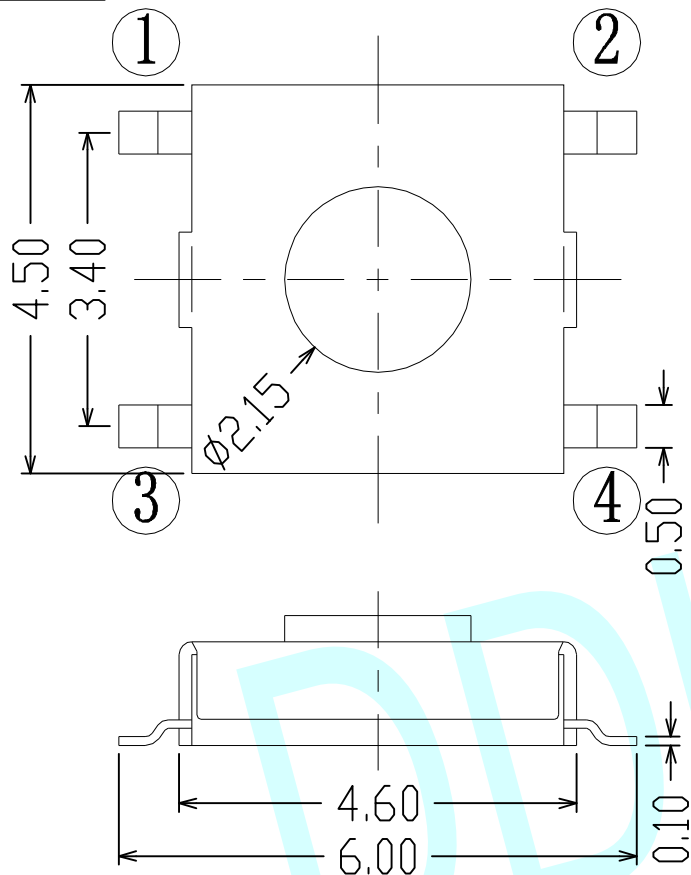


ROHS





Circuit Diagram

NOTES:

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance: $\leq 100m\Omega$
3. Insulated resistance: $\geq 100M\Omega$
4. Dielectric strength: $\geq 250V$ AC/1min
5. Endurance: 100, 000 cycles

Stergth	90±30	130±30	180±30	250±30
---------	-------	--------	--------	--------

APPROVALS		DATE	http://www.dongdudz.com		 东都电子 DONGDU ELECTRONICS	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:		
CHECKED:	***	****	30°	±0.30		±2°
APPOVALS:	***	****	10°30	±0.20		
			5°10	±0.15		
			≤5	±0.10	MODEL: TACT SWITCHES PART NO: DDU-1170 UNIT :mm SCALE: 1:1  REV: A PAGE: 1/1	