



ROHS

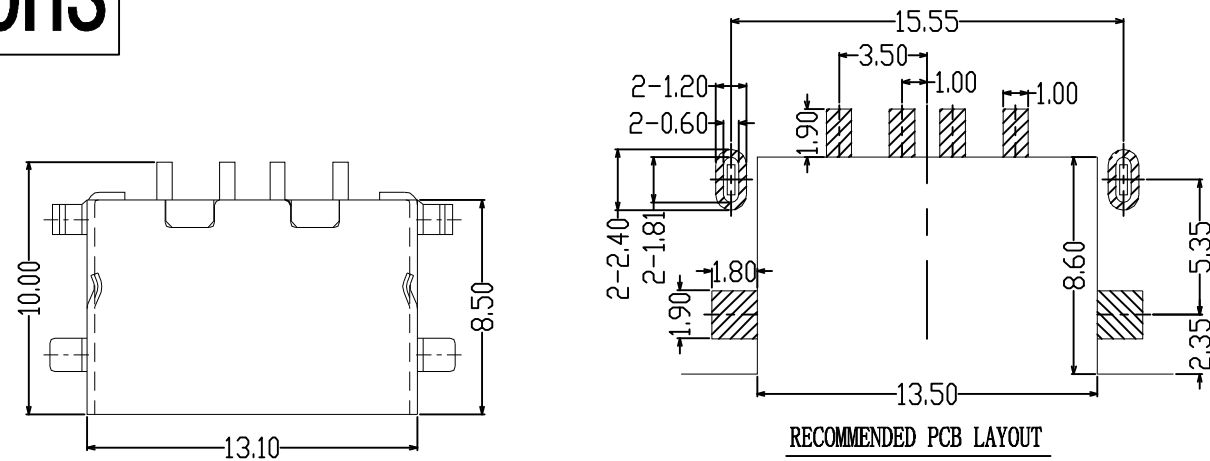

RECOMMENDED PCB LAYOUT

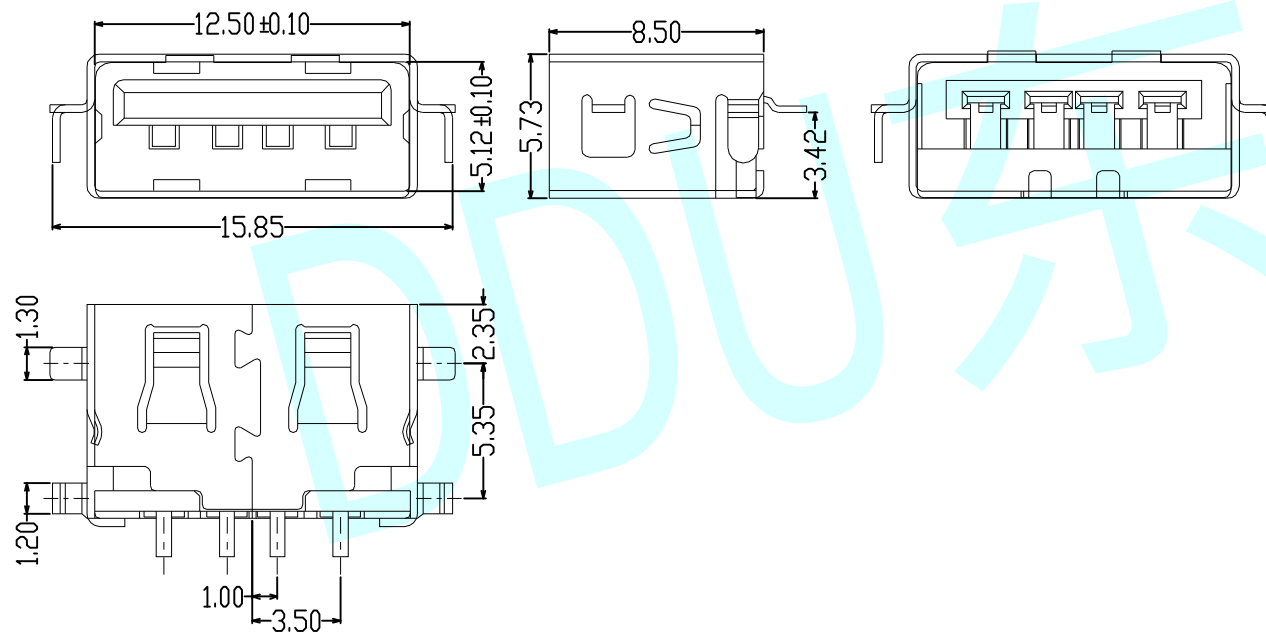

NOTES:

A. Electrical performance:

1. Rated current: 2A
2. Rated voltage: 20V
3. Withstand voltage: 500V AC for 1 minute
4. Contact resistance: 30mΩ max
5. Insulation resistance: 1000MΩ min

B. Mechanical properties:

1. Insertion force: 35N max, Pullout force: 10N min
2. Life: 1500 cycles, Pullout force: 8N min
3. Thrust: 70N min
4. Peel strength: 150N min
5. Twist strength: 1Nm

C. Material:

1. Rubber core: LCP
2. Shell: SPCC
3. Terminal: C2680

D. Salt fog: 24H

E. Working temperature: -20°C~+85°C

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	***	30≥	±0.30	
APPOVALS:	***	***	10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	
			±2°		
				MODEL:	USB CONNECTOR
				PART NO:	USB-A-28A-1.9
				UNIT :mm	SCALE:1:1
			REV:	A	
			PAGE:1/1		



MODEL:	USB CONNECTOR
PART NO:	USB-A-28A-1.9
UNIT :mm	SCALE:1:1
REV:	A
PAGE:1/1	