
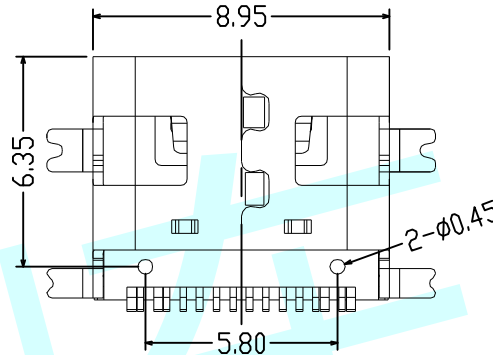

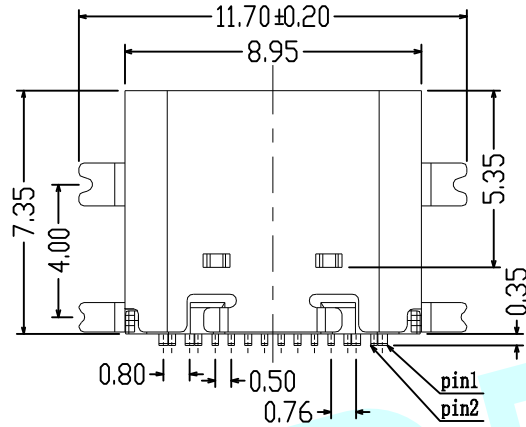
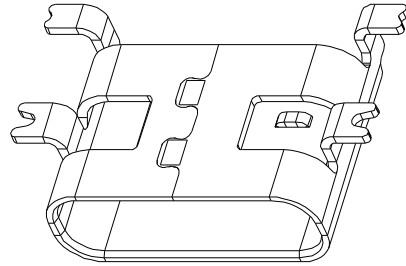


ROHS

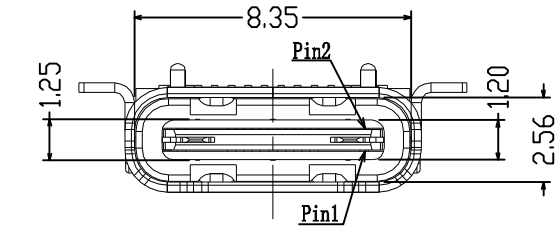




NOTES:

1. Material:

- 1.1. Terminals: C5191R-EH, T=0.15mm
- 1.2. Rubber core: LCP+30%GF: Color: Black
- 1.3. Shell: SUS 304r-1/2H, T=0.30mm

2. Electroplating:



- 2.1. Terminal: electroplating nickel bottom 50U "min. (welding area) tin pin plating bright tin 80U" min
- 2.2. Shell: nickel plated bottom 50U "Min

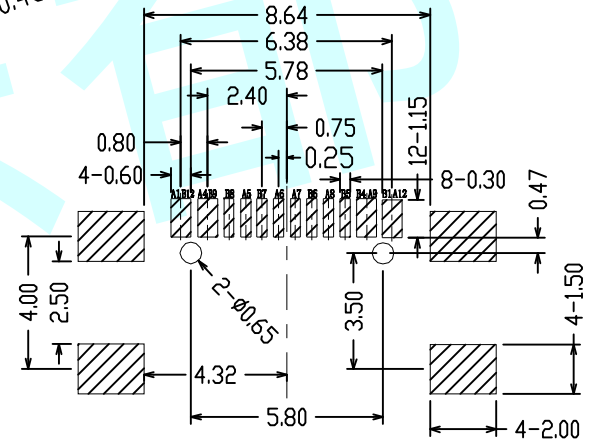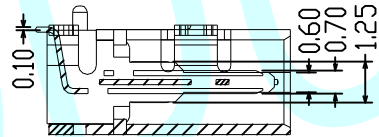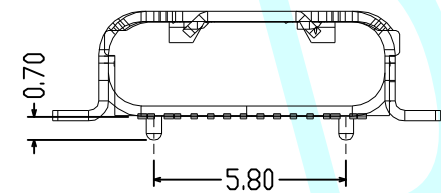

RECOMMENDED PCB LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

Product Edge

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN1
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

APPROVALS		DATE	http://www.dongdudz.com			
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:		
CHECKED:	***	***	30°	±0.30		
APPOVALS:	***	***	10°30'	±0.20		
			5°10'	±0.15		
			≤5	±0.10		
			±2°	 ® 东都电子 DONGDU ELECTRONICS		
				MODEL:	USB CONNECTOR	
				PART NO:	TYPE C 3.1-19M	
				UNIT :mm	SCALE:1:1	
			REV:	A	PAGE:1/1	