

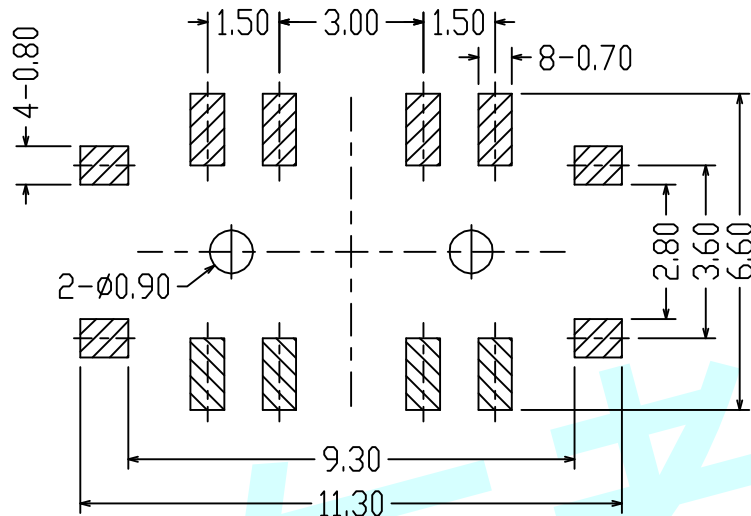




**ROHS**

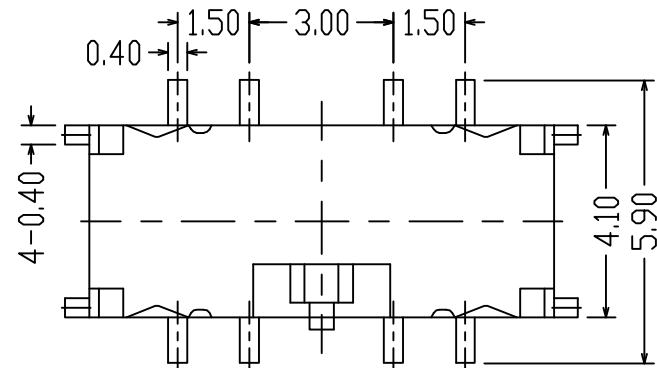

PCB Layout (Pattern Side)

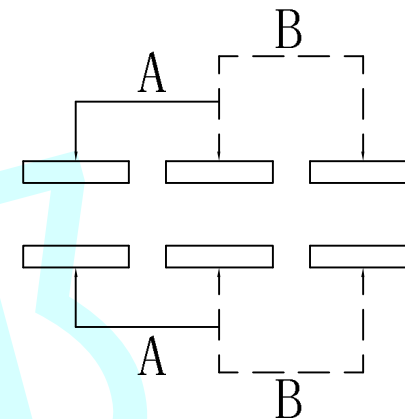

Circuit Diagram

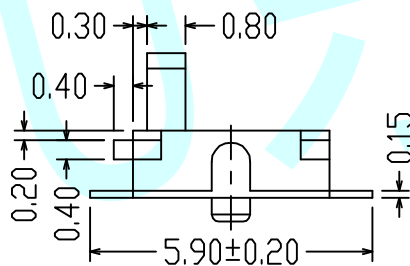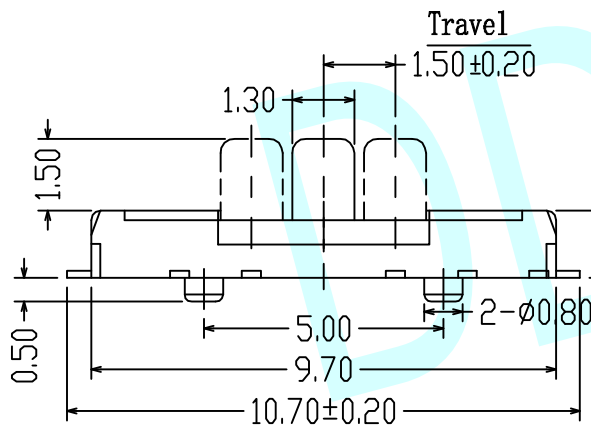

Operating force: a→b } 2N  
                           c→b }  
                           b→a } 2.5N  
                           b→c }

NOTES:

1. Operating temperature range:  $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2. Rating: DC 4V 300mA
3. Insulation resistance:  $100\text{M}\Omega$  min, DC 100V
4. Contact resistance:  $70\text{m}\Omega$  max
5. Dielectric strength: AC 250V for 1 minute
6. Operating force: 2C-2P:  $200 \pm 50\text{gf}$

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:	
CHECKED:	***	***	30≥	±0.30	
APPOVALS:	***	***	10~30	±0.20	
			5~10	±0.15	
			≤5	±0.10	
			±2°	东都电子 DONGDU ELECTRONICS	
MODBL:		TOGGLE SWITCHES			
PART NO:		DDU-1466SU			
UNIT :mm	SCALE: 1:1				
REV:	A	PAGE: 1/1			