

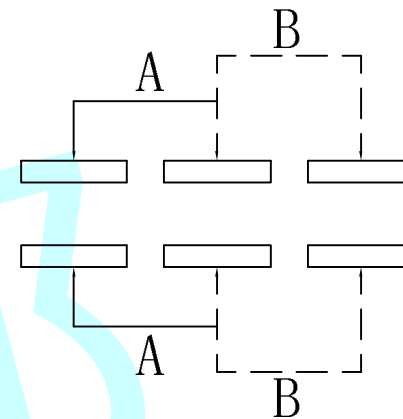
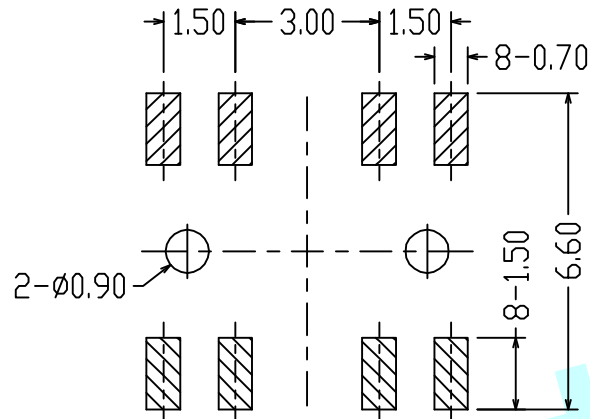
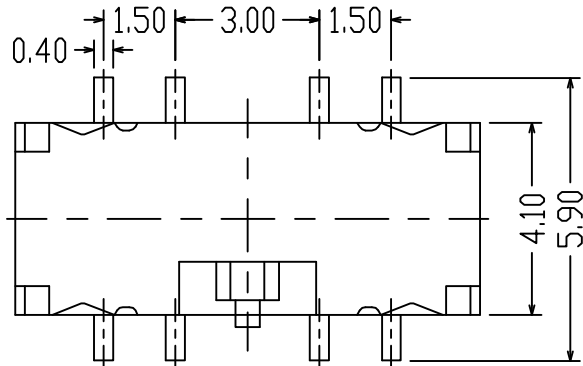


ROHS

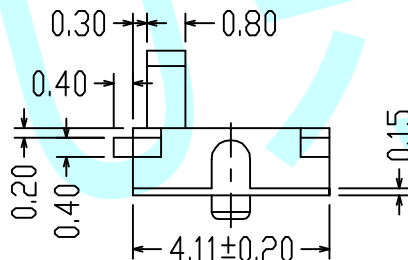

PCB Layout (Pattern Side)


Circuit Diagram

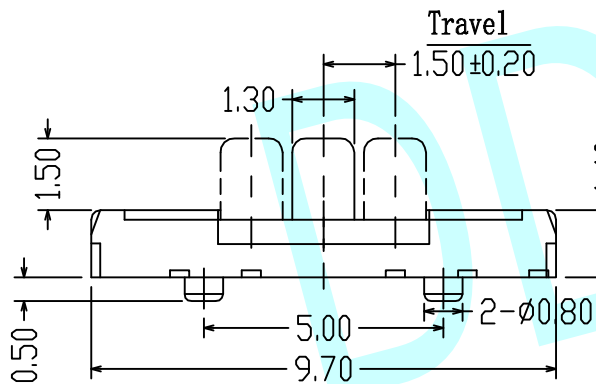

Operating force: a→b } 2N
 c→b }
 b→a } 2.5N
 b→c }

NOTES:

1. Operating temperature range: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2. Rating: DC 4V 300mA
3. Insulation resistance: $100\text{M}\Omega$ min, DC 100V
4. Contact resistance: $70\text{m}\Omega$ max
5. Dielectric strength: AC 250V for 1 minute
6. Operating force: 2C-2P: $200 \pm 50\text{gf}$

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	***	30 \geq	±2°
APPOVALS:	***	***	10~30	
			5~10	
			≤5	
			 ® 东都电子 DONGDU ELECTRONICS	
			MODEL:	TOGGLE SWITCHES
			PART NO:	DDU-1466SK
			UNIT :mm	SCALE:1:1
			REV:	A
				PAGE:1/1