

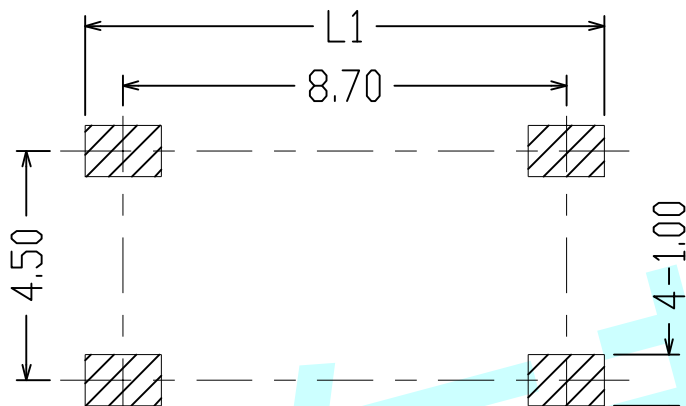


ROHS


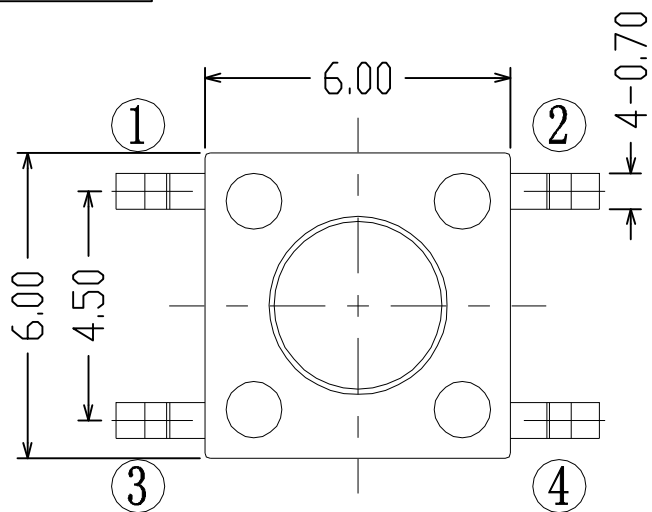


Circuit Diagram



PCB Layout (Pattern Side)

NOTES :

1. Rating :DC 12V 50mA.
2. Contact resistance: $\leq 100\Omega$ MAX
3. Insulation resistance: $\geq 100M\Omega$ MIN
4. Travelled: $0.25 \pm 0.10\text{mm}$
5. Operating temperature: -25°C to 85°C

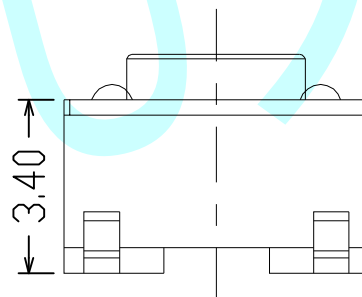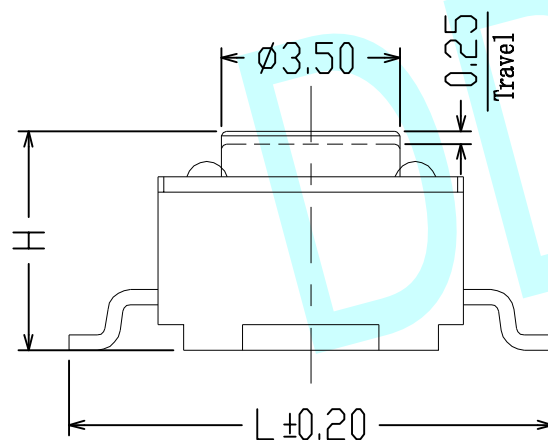

L1	10.0	11.0	11.0	12.0	12.0					
L	8.0	8.5	9.0	9.5	10.0					
H	13.50	14.00	15.00	15.50	16.00	17.00	18.00	19.00		
	8.50	9.00	9.50	10.00	10.50	11.00	11.50	12.00	12.50	13.00
	4.00	4.30	4.50	5.00	5.50	6.00	6.50	7.00	7.50	8.00
Stergth	90±30		130±30		180±30		250±30		350±50	

APPROVALS		DATE	http://www.dongdudz.com		
DRAW:	ZRD	2017-12-6	TOLERANCE:		ANGLE:
CHECKED:	***	****	30 \geq	± 0.30	$\pm 2^\circ$
APPOVALS:	***	****	10 \sim 30	± 0.20	
			5 \sim 10	± 0.15	
			≤ 5	± 0.10	
				 ® 东都电子 DONGDU ELECTRONICS	
MODEL:		TACT SWITCHES			
PART NO:		DDU-1101S			
UNIT :mm		SCALE: 1:1			
REV:		A		PAGE: 1/1	