

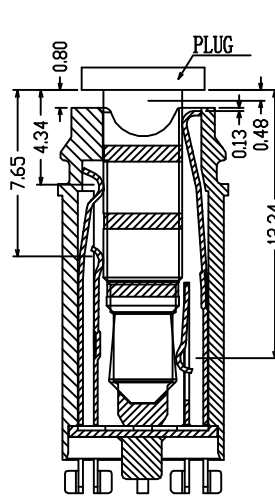
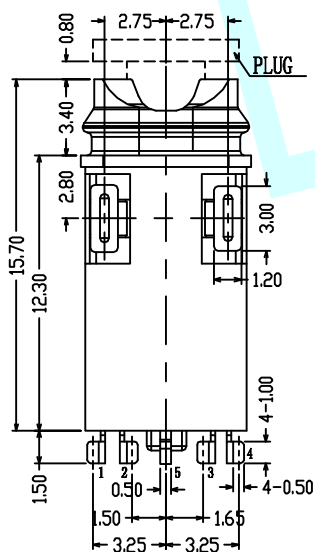



# ROHS




防水等级: IPX7

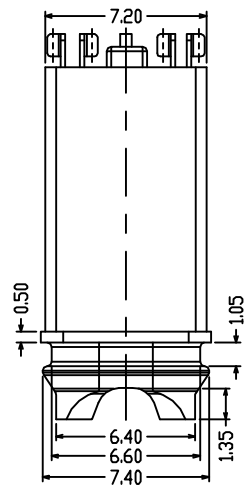

SBC :A-A  
Image Of Plug Match  
With Contact Point

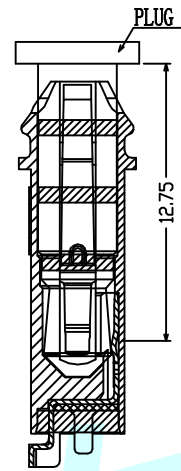


SBC :B-B  
Image Of Plug Match  
With Contact Point

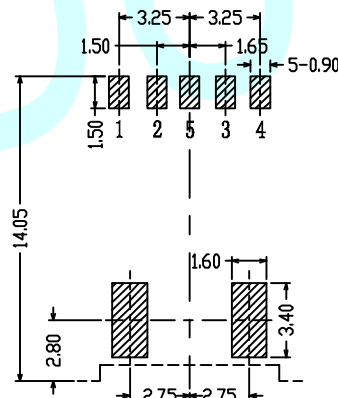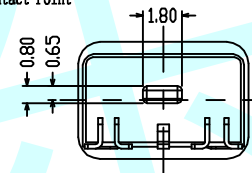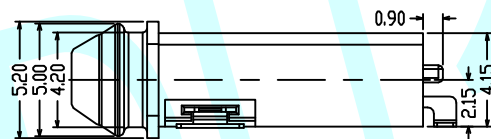


Recommend PCB Layout (Top View)  
Tolerance : ±0.05

NOTE:

1. Contact Current Rating :12V 1A
2. Contact Resistance :50mΩ Max
3. Insulation Resistance:100M MIN. 500V DC
4. Dielectric Withstanding:500V AC MIN
5. Durability :5,000 Cycles MIN
6. Connector Mating Forces:29. 4N(3. 00kgf) MAX
7. Connector Unmating Forces:2. 94N(0. 30kgf) MIN




Schematic

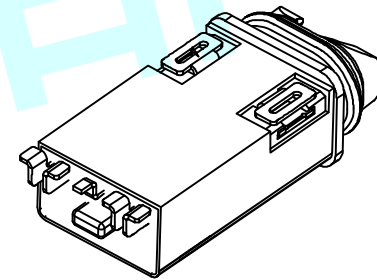

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥ ±0.30	±2°
APPOVALS:	***	****	10°30 ±0.20	
			5°10 ±0.15	
			≤5 ±0.10	

 <b>东都电子</b> DONGDU ELECTRONICS	
MODEL:	PHONE JACKES
PART NO:	PJ-272
UNIT :mm	SCALE:1:1
REV:	A
	PAGE:1/1