



ROHS

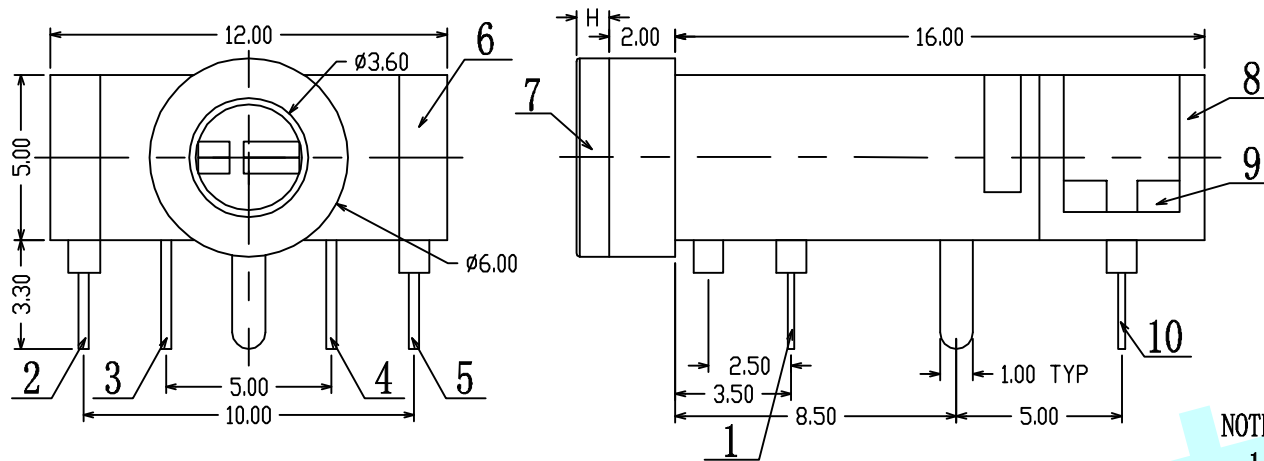

NOTES:

1. Rating :0.5A 30V DC
2. Contact Resistance :30mΩ Max
3. Insulation resistance:100MΩ (DC 250V)
4. Withstand voltage:AC 500V
5. Insertion and extraction force:3-25N
6. Operating Life:5,000 Cycles

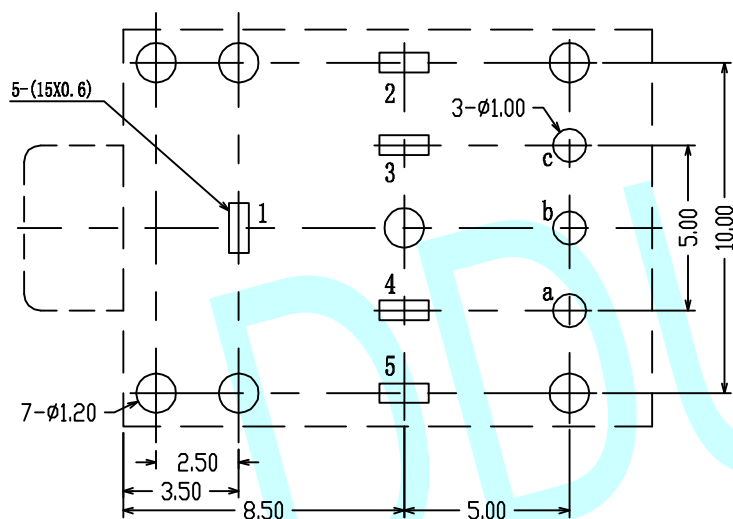


PCB Layout (Copper-Sided View)


H	1.00	1.30
---	------	------

No.	Part Name	Q' TY	Material	Plating
10	Contact Foot	3	H62 Brass	Ag-Plating
9	Switch	1	PF	
8	Cover	1	POM/PA66	
7	Axis Support	1	H59 Brass	Ag-Plating
6	Housing	1	PBT/PA66	
5	5# Contact	1	65Mn Steel	Ag-Plating
4	4# Contact	1	H62 Brass	Ag-Plating
3	3# Contact	1	H62 Brass	Ag-Plating
2	2# Contact	1	65Mn Steel	Ag-Plating
1	1# Contact	1	Phosphor Bronze	Ag-Plating

Schematic

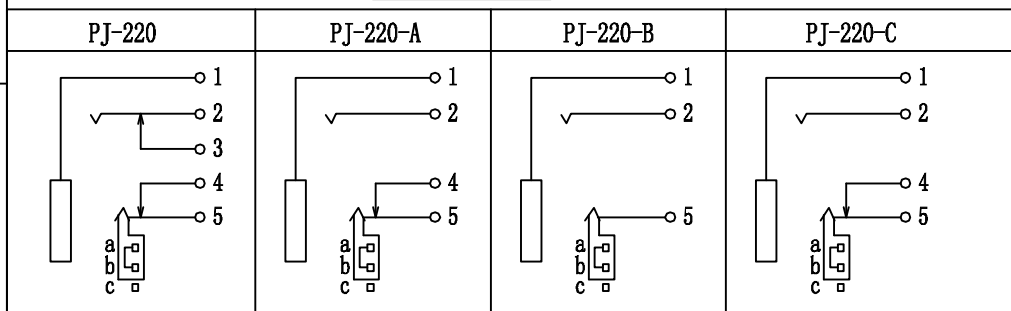

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30≥	±0.30
APPROVALS:	***	****	10°30	±0.20
			5°10	±0.15
			≤5	±0.10

 东都电子	
DONGDU ELECTRONICS	
MODEL:	PHONE JACKS
PART NO:	PJ-220
UNIT :mm	SCALE:1:1
REV:	A