
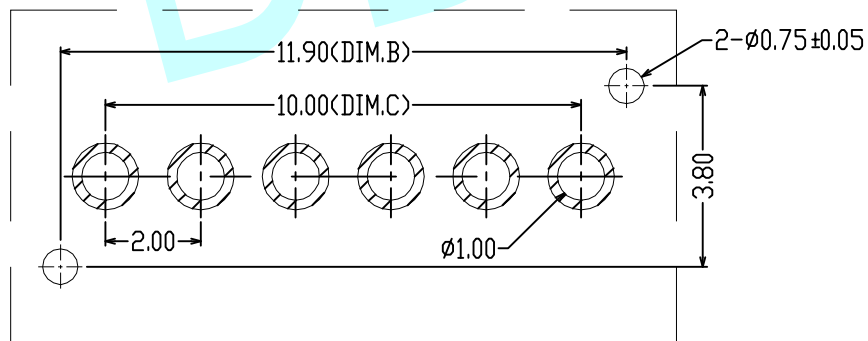
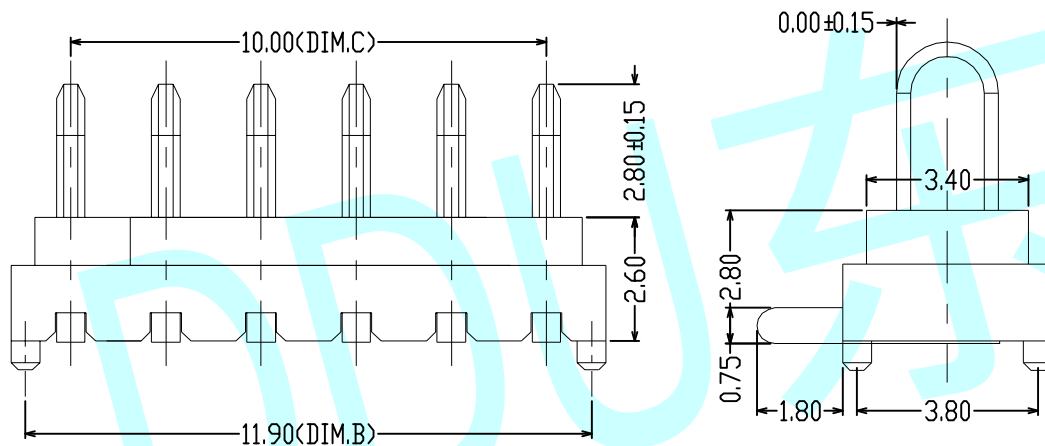


ROHS

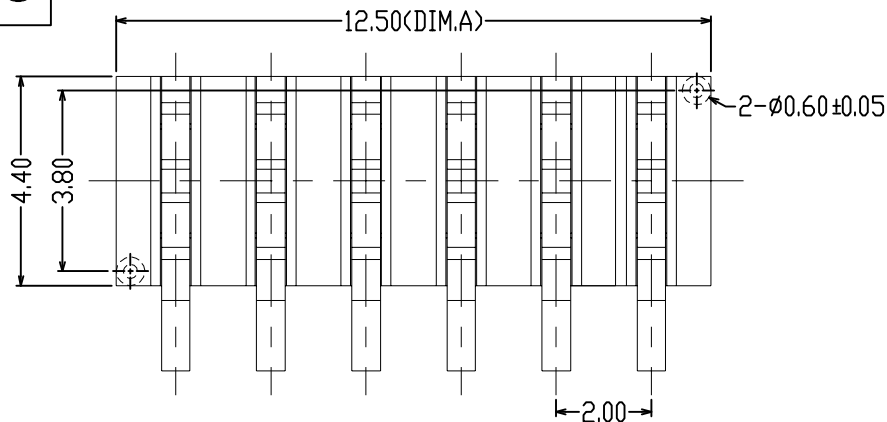

PCB LAYOUT
TOLERANCE: ± 0.05

NOTES;

1. 额定电压: AC/DC 30V max
2. 绝缘耐压: AC 1000V 1MINUTE无损伤
3. 绝缘电阻: DC 500V 1MINUTE, 1000M Ω min
4. 材质: 塑胶LCP130I, 五金件C2680R-H镀金
5. 操作温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

10P	20.50	19.90	18.00
9P	18.50	17.90	16.00
8P	16.50	15.90	14.00
7P	14.50	13.90	12.00
6P	12.50	11.90	10.00
5P	10.50	9.90	8.00
4P	8.50	7.90	6.00
3P	6.50	5.90	4.00
2P	4.50	3.90	2.00
Pin	DIM. A	DIM. B	DIM. C

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30 \geq	± 0.30
APPOVALS:	***	****	10 \sim 30	± 0.20
			5 \sim 10	± 0.15
			≤ 5	± 0.10
			$\pm 2^{\circ}$	



MODEL:	BATTERY	
PART NO:	DDU-BC-51-6PD	
UNIT :mm	SCALE: 1:1	
REV:	A	PAGE: 1/1