

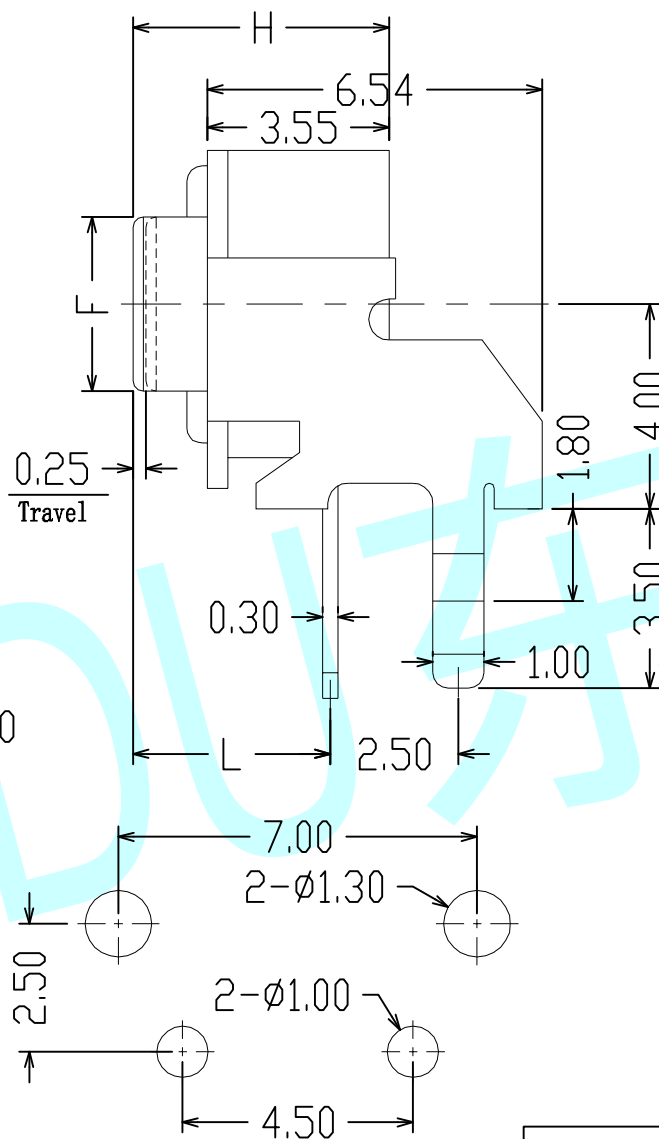


**ROHS**

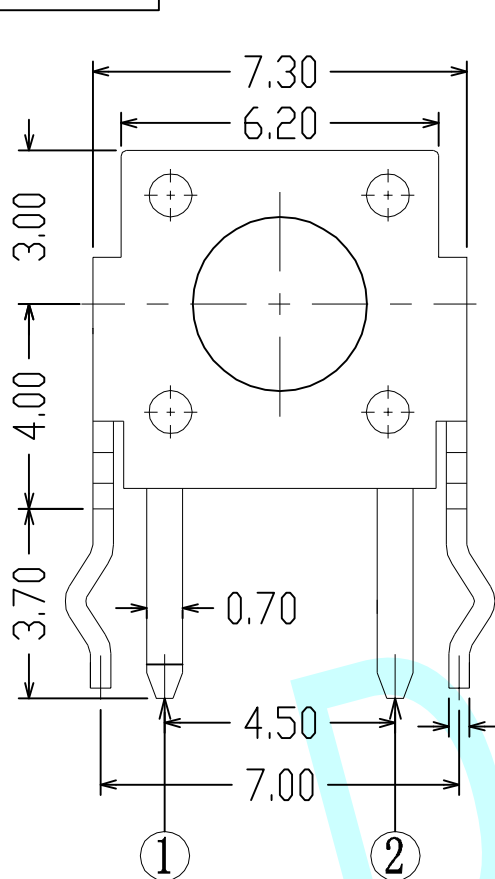



Circuit Diagram

**NOTES:**

1. Rate voltage. current: 50mA DC 12V
2. Contact resistance:  $\leq 100m\Omega$
3. Travel:  $0.25 \pm 0.10mm$
4. Insulated resistance:  $\geq 100M\Omega$
5. Dielectric strength:  $\geq 250V AC/1min$
6. Endurance: 100, 000 cycles

PCB Layout (Pattern Side)

H	L	F
4.30	3.15	3.40
4.50	3.35	3.40
5.00	3.85	3.40
5.50	4.35	3.30
6.00	4.85	3.30
6.50	5.35	3.30
7.00	5.85	3.30
7.50	6.35	3.30
8.00	6.85	3.30
8.50	7.35	3.30
9.00	7.85	3.30
9.50	8.35	3.30
10.00	8.85	3.00
10.50	9.35	3.00
11.00	9.85	3.00
11.50	10.35	3.00
12.00	10.85	3.00
12.50	11.35	3.00
13.00	11.85	3.00

APPROVALS		DATE	http://www.dongdudz.com	
DRAW:	ZRD	2017-12-6	TOLERANCE:	ANGLE:
CHECKED:	***	****	30 $\geq$	$\pm 2^\circ$
APPOVALS:	***	****	10 $^{\circ}$ 30	
			5 $^{\circ}$ 10	
			$\leq 5$	
			 <b>东都电子</b> DONGDU ELECTRONICS	
			MODEL: TACT SWITCHES PART NO: DDU-2022 UNIT :mm SCALE: 1:1  REV: A PAGE: 1/1	